

Domino Classic

Personal hearing system



 **Bellman & Symfon®**
DESIGN FOR EARS



Features

Digital signal processing
Sound with incredible detail

Encrypted broadband link
Secure from eavesdropping

Easy to use
Be up and running within minutes

Pocket size and light
Fits discretely in your pocket

Domino Classic is a personal hearing system that helps you hear better in most everyday situations, whether you use hearing aids or just suffer the occasional hearing difficulty.

Digital signal processing. Domino Classic uses digital state-of-the-art signal processing technology. As a result, the system delivers music and speech with incredible detail, even in difficult listening situations.

Worry free communication. Domino Classic uses the 2.4 GHz global frequency standard for wireless broadband communication, just like your Wi-Fi computer at work. This means you can use Domino Classic anywhere in the world.

The system uses secure 128-bit digital encryption technology which makes it virtually impossible to eavesdrop.


Pocket size and super light. The units are as small as a modern cell phone and weigh just 2½ oz each. So they can be kept discretely in your pocket without weighing you down.

Easy to use. The system is virtually intuitive to use. All functions are accessed with the simple press of a button and there are no complicated menus to navigate.

Long lasting power. The units are powered with rechargeable lithium-ion batteries, just like a modern cell phone. So you never need to worry about buying new batteries.

Enjoy music and TV. Connect the Domino Classic transmitter to your TV or stereo system and enjoy wireless broadband Hi-fi sound at your own volume.

High quality. Domino Classic is designed by Bellman & Symfon of Sweden and comes with a two-year worldwide warranty.

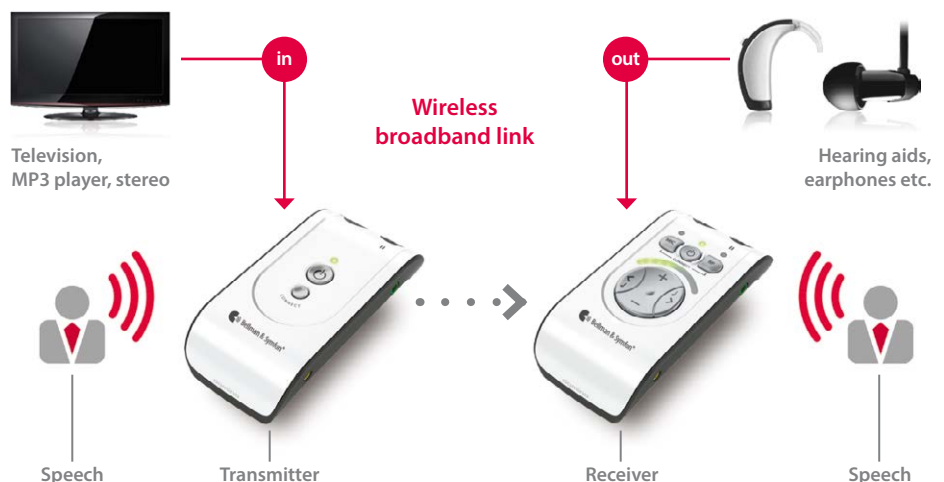

Technical specifications

Size and weight

Height:	3.9", 99 mm
Width:	1.9", 48 mm
Depth:	0.9", 22 mm
Weight:	2.4 oz, 74 grams / unit



Input signals

- Microphones: Built in omni directional microphones on both units
- External sound source input: 2.5 mm stereo jack plug (0 dBV max input signal)

Output signals

- Headphone socket: 3.5 mm stereo jack plug
- Distortion: 0.05% THD (electrical)
- Frequency range: 40-10 000 Hz
- Tone control: 9 steps
- Volume control: 9 steps, cut-off frequency 1.6 kHz
- Output power: 100 mW (16 Ω load)

Radio communication

- Frequency 2.4 GHz, uses 3 frequencies
- Range 25 m indoors, clear line of sight
100 m outdoors, clear line of sight
- Characteristics:
Encrypted communication
Automatic channel searching
Coexists with other radio transmitters operating on the 2.4 GHz frequency band

Environmental requirements

- Operating temperature: 32° to 95° F (0° to 35° C)
- Relative humidity: 5% to 95% (non condensing)

In the box

The package, BE8015 includes everything you normally need in order to use your system.

- BE2250 Receiver unit
- BE2270 Transmitter unit
- BE9142 USB universal charger including 4 mains plugs for EU, GB, US and AU



- BE9147 Black canvas travel case
- BE9124 In-ear stereo earphones
- BE9135 Neck straps with safety clasp and polished stainless steel belt clips
- User manual
- Available bundled with BE9159 Neck loop (BE8017)

Power and battery

- Built in rechargeable lithium-ion battery on both units
- Operating time: 8-12 hours (With included light weight battery)
- Charging time: 2.5 hours (With included light weight battery)

Acoustic specifications

- Maximum output using BE9124 earphones 132 dB SPL
- Gain at full volume using BE9124 earphones (60 dB SPL input signal):
57,5 dB @ 1kHz 56 dB HFA
- Distortion
Using BE9124 0.08 % THD
Using BE9122 0.6 % THD

Regulatory requirements


- Complies with the following requirements: **CE, FCC, RoHS, WEEE, RCM and UL**



Receiver button and controls



Transmitter button and controls

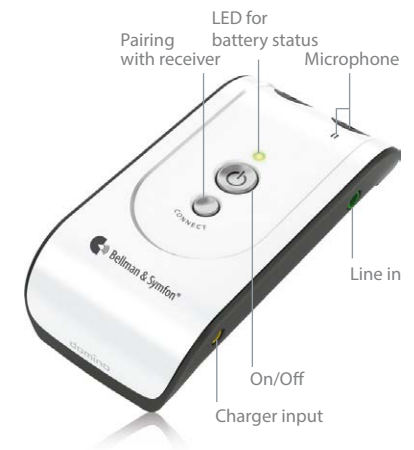

Accessories

The following accessories are available:

- BE2250 Additional receiver unit
- BE9122 Stereo headphones
- BE9124 Stereo in-ear earphones
- BE9403 Stetoclips
- BE9127 Tie-clip microphone
- BE9126 Cable kit, 5 m (stereo) incl. adapter from 3.5 mm stereo tele jack to RCA (phono)
- BE9159/BE9161 Neck loop

© 2020, Bellman & Symfon AB

Bellman and Bellman & Symfon are registered trademarks owned by Bellman & Symfon AB, all rights reserved. All Product designs are patented. Subject to change without prior notice.

BE2250_021DAS003_EN

bellman.com

In-depth technical information

Features

- Digital Signal Processing, DSP
- Omni directional microphones on both units
- Dynamic range compressor
- Dynamic noise reduction
- Adaptive feedback manager
- Radio transmission using broadband technology
 - Uses the non-licensed 2.4GHz ISM band
 - One transmitter to one or multiple receivers
- Intuitive user interface
 - LED light bar for excellent readability
 - Clear indication of Volume, Tone, Mic & RF mode
 - Low battery warning indicator
- Auxiliary stereo signal input (2.5 mm tele jack)
- Headphones stereo output (3.5 mm tele jack)
- Mix mode mixes sound from transmitter and receiver
- Auto mute when switching between signal sources
- High gloss finish to minimize handling sound
- Requires no individual fitting
- Built-in rechargeable lithium-ion batteries
- BE9142 USB universal charger with 4 mains plugs for EU, GB, US & AU are included
- BE9147 Black canvas travel case included
- BE9124 Earphones included
- BE9135 Neck straps with safety clasp and polished stainless steel belt clips included
- Available bundled with BE9159 Neck loop (BE8017)
- **Supported configuration**
1 Domino Pro transmitter and 1+ Domino Classic receiver(s) and 1+ Domino Pro receiver(s).
- **Non recommended configuration**
1 Domino Classic transmitter and 1+ Domino Classic receiver(s) and 1+ Domino Pro receiver(s).

Technical specifications

- Dimensions: 99 mm (h) x 48 mm (b) x 22 mm (d)
- Weight: BE2250: 74 g, BE2270: 70 g
- Batteries: Built in rechargeable lithium-ion, 617 mAh
- Operating time: 8-12 hours (fully charged)
- Charging time: 2.5 hours (max)
- Ext. Mic./Aux. in connector: 2.5 mm stereo tele jack
- Headphones connector: 3.5 mm stereo tele jack
- Volume and Tone control: 9 steps
- Power switch: On/Off toggle button
- Mic and RF mode: Separate mode select buttons
- External microphone / Aux in selects automatically when plugged in
- Dynamic Range Compressor
 - Dynamic gain range 0-35 dB
 - Compression 3:1
 - Expansion 1:1.5
 - Attack time 20 (25) ms (≥ 3 kHz)
 - Release time 110 (200) ms (> 3 kHz)
- 10 channel dynamic noise reduction
- Adaptive phase-invert feedback cancellation
- Digital signal processing
 - 22 050 kHz sampling frequency
 - 16 bit resolution in stereo
- Digital radio transmission
 - 2.4 GHz ISM band, 3 channels
 - Automatic channel allocation
 - 128 bit encryption
- Topology: Point-to-point or point-to-multipoint
- Diversity
2 antennas receive, 1 antenna transmits Rx + Rx/Tx
- Radio range
25 m indoors, clear line of sight
100 m outdoors, clear line of sight
- Transmitter output power: max 25 mW


Acoustic specifications

- Maximum output saturation
 - Using BE9122 Headphones
BE2250: 124.3 dB SPL / BE2270: 124.3 dB SPL (@ 2.5 kHz)
 - Using BE9124 Earphones
BE2250: 132.0 dB SPL / BE2270: 130.5 dB SPL (@ 5 kHz)
 - Using BE9403 Stetoclips
BE2250: 145.6 dB SPL / BE2270: 145.6 dB SPL (@ 1 kHz, 90 dB SPL)
- Gain, full volume (1 kHz, 60 dB SPL input signal)
 - Using BE9122 Headphones
BE2250: 42.5 dB / BE2270: 44.0 dB
 - Using BE9124 Earphones
BE2250: 55.0 dB / BE2270: 57.5 dB
 - Using BE9403 Stetoclips
BE2250: 69.6 dB / BE2270: 69.6 dB
- Gain, full volume (60 dB SPL input signal, HFA)
 - Using BE9122 Headphones
BE2250: 46.5 dB / BE2270: 49.0 dB
 - Using BE9124 Earphones
BE2250: 51.5 dB / BE2270: 56.0 dB
 - Using BE9403 Stetoclips
BE2250: 52.0 dB / BE2270: 59.4 dB
- Distortion
 - Using BE9122 Headphones
0.6 % THD
 - Using BE9124 Earphones
0.08 % THD


Electrical specifications

- Output power tele-jack 100 mW at 16 Ω load
- Impedance, headphones 8 – 72 Ohm
- Distortion 0.05 % THD
- Dynamic range 95 dB
- Frequency range 40 – 10 000 Hz
- Tone control
 - Break point at 1.6 kHz
 - Tone, high: +10dB@3.15 kHz, -6dB@250Hz
 - Tone, mid: flat
 - Tone, low: -10dB@3.15 kHz
No bass boost
- Line in sensitivity
0 dBV (maximum input level)

Output using BE9124 Earphones

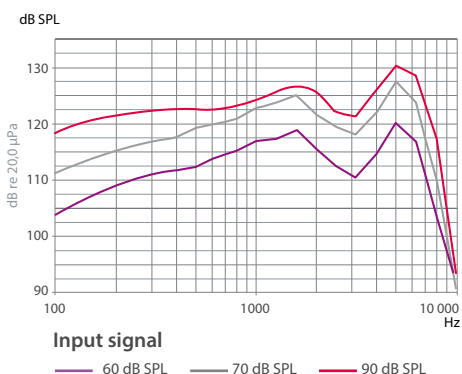

Output using BE9122 Headphones

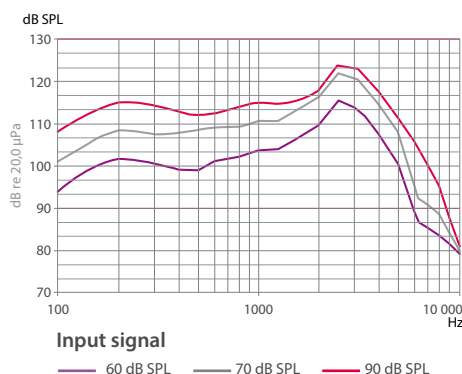

Output using BE9043 Stetoclips

