

# Visit telephone transmitter


## BE1432



## Stay connected to your loved ones.

The Visit telephone transmitter is part of the Visit smart home system that helps people with hearing loss to keep tabs on their home. It features a Bluetooth connection to your smartphone and built-in support for Messenger, Skype, WhatsApp, WeChat and Line. This makes it easier than ever to stay connected. The Visit telephone transmitter is controlled via an easy-to-use app that is available for both iOS and Android.

Aside from mobile phone detection, the telephone transmitter can also detect the landline telephone and be used with a Contact Mat accessory, Magnetic Switch accessory or an existing doorbell.

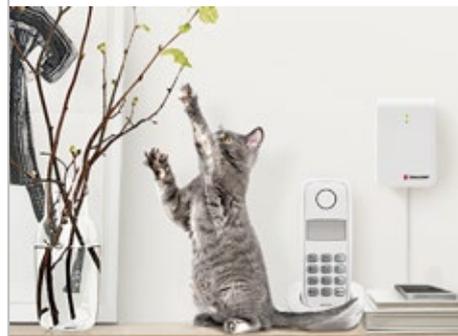

### Features

**Bluetooth 5**  
Up to 50 m coverage

**Mobile phone support**  
Alerts for calls and messages

**Messaging app support**  
Alerts for Skype, WhatsApp etc.

**Landline phone support**  
Alerts for incoming calls

**App controlled**  
Available for iOS & Android



# Technical specifications




## Size and weight

- Height: **100 mm, 4.0"**  
Width: **65 mm, 2.6"**  
Depth: **27 mm, 1.1"**  
Weight: **120 g, 4.2 oz. incl. batteries**



## Buttons and connectors

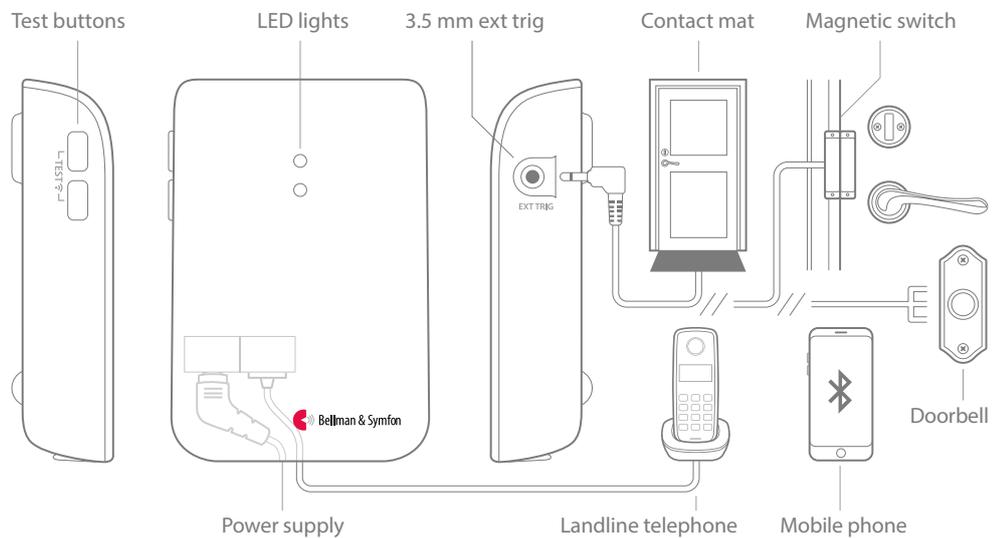

## Connectivity

- RJ11 input to analogue telephone network
- 3.5 mm ext. trig input for accessories
- Power supply jack
- Bluetooth 5.0

## Activation

- A smartphone via Bluetooth
- The test buttons and the landline telephone
- The contact mat or magnetic switch accessory
- A doorbell, etc. connected to the ext. trig.

## Environmental requirements

- For indoor use only.
- Temperature: 0 – 35 °C, 32 – 95 °F.
- Relative humidity: 5% – 95% (non condensing)

## Frequency and coverage

- ISM frequency: 868.30 MHz
- ISM coverage: Up to 250 m (275 yd)
- Bluetooth frequency: 2402 – 2480 MHz
- Bluetooth coverage: Up to 50 m

## Compability

- iOS11 and later | Android 4.4 and later
- iPhone 6S and later | Modern Android devices

## Power and battery

- Mains power: 5 V DC / 1000 mA
- Backup batteries: 2 x 1.5 V AA Alkaline

## Number of radio keys

- 64 as standard. Up to 256 with optional software.

## Maintenance and cleaning

- Use a soft, lint-free cloth. Avoid getting moisture in openings. Don't use household cleaners.
- Not reusable.

## Regulatory requirements

- Complies with the following requirements: CE, BQB, RoHS, WEEE, Der Grüne punkt



## In the box

- BE1432 Visit telephone transmitter
- Power supply and power cable
- 2 x 1.5V AA alkaline batteries
- Pre-mounted telephone cord
- Telephone splitter
- Screw and plug



## Accessories

The following accessories are available:

- BE9023 Magnetic switch
- BE9026 Contact mat
- BE9253 External trigger cable (3.5 mm connector)

© and TM 2019, Bellman & Symfon AB

Bellman and Bellman & Symfon are registered trademarks owned by Bellman & Symfon AB, all rights reserved. All product designs are patented. This leaflet is subject to change without prior notice.

BE1432\_032DSH001\_EN

[bellman.com](http://bellman.com)