

# Neck Loop

BE9159-P02

BE9161-P02



## Features

- 1 High output power**  
Dual channel output
- 2 Safety breakaway neck strap**  
To avoid strangulation
- 3 Replaceable soft fabric tube**  
For comfort and hygiene
- 4 Soft spray-coated housing**  
For increased comfort
- 5 Silicone cable material**  
For easy handling
- 6 Tie-clip**  
For correct positioning
- 7 Gold plated plugs**  
To avoid corrosion

## Boost your hearing aids.

The Neck Loop from Bellman & Symfon works with sound sources that feature a 3.5 mm output. Connect it to your speech amplifier, mobile, tablet or computer and switch the hearing instruments to "T" position. The Neck Loop is lightweight and comfortable and can be worn under your shirt.

### Technical specifications

- Neck strap length 70 cm, 2.3'
- Cable length BE9159-P02 90 cm, 3'
- Cable length BE9161-P02 15 cm, 6"
- Neck Loop diameter 22 cm, 9"

### Approvals

**MD** This product is a medical device in conformity with Regulation (EU) 2017/745 (Medical Device Regulation).

### Size housing

- Width 3.4 cm, 1.3"
- Height 3.8 cm, 1.5"
- Thickness 1.4 cm, 0.5"
- Weight BE9159-P02 62 g, 2.2 oz
- Weight BE9161-P02 58 g, 2 oz

### Output

- 1500 mA/m @ 15 cm / 6" distance and 2 x 50 mW input signal


### Input

- 3.5 mm tele plug (stereo) gold plated connector, 90 degrees angle
- Impedance: 2 x 5 ohm





# Technical specifications

Frequency response (Scale reference: -20 dB ~ 0.1 A/m)

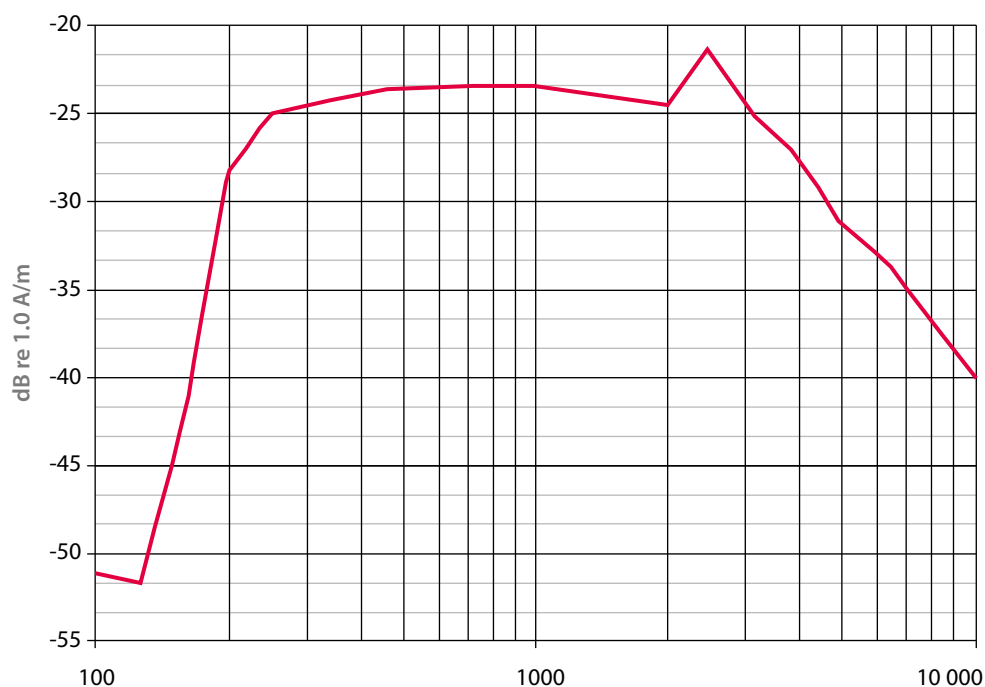

## Using BE9161-P02 with Domino and Mino

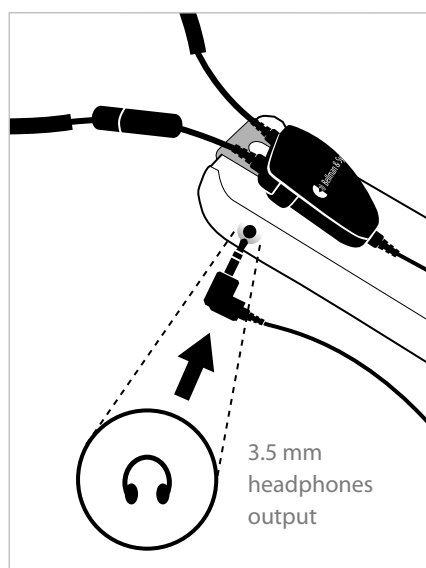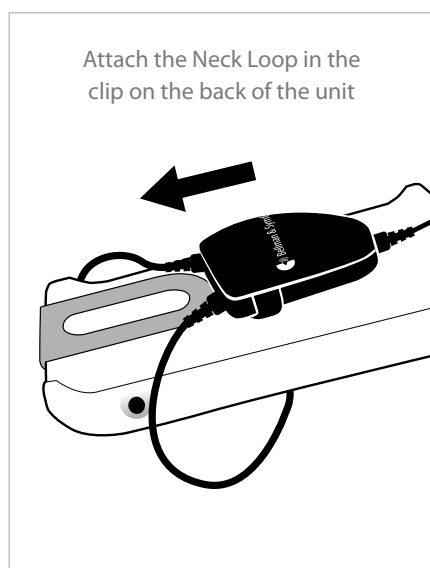

© 2025, Bellman & Symfon AB. All rights reserved.

Bellman, Bellman & Symfon and the Bellman & Symfon logo are registered trademarks of Bellman & Symfon AB. This leaflet is subject to change without prior notice.

BE9159-P02\_BE9161-P02\_001DSH1.0

[bellman.com](https://bellman.com)