




Mobile phone sensor

BE9250 | BE9251

Buttons and connections

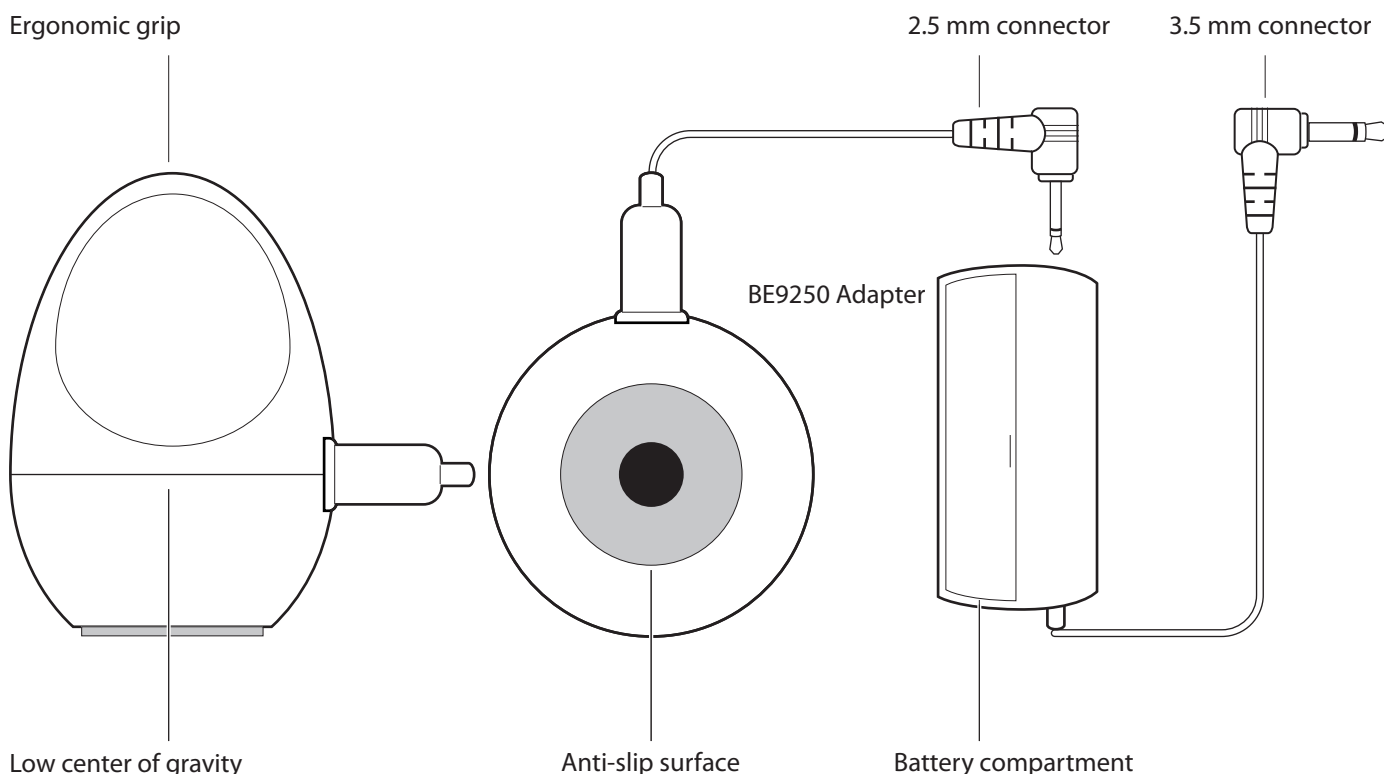

Model overview

BE9250 model

The BE9250 model has an adapter and connects to all Bellman & Symfon products with a 3.5 mm ext. trig. input.

Compatibility

- BE1580 Visit alarm clock
- BE1370 Pro alarm clock

Technical specifications

- Battery power: 1 x AAA 1.5 V alkaline battery
- Optical detection: Activated when the display lights up
- Light sensitivity: Visible light >3 lux for longer than 2 s
- Connectors:
Mobile phone sensor: 2.5 mm mono jack plug
Adapter: 3.5 mm mono jack plug
- Cable length: 120 cm, 4'
- Sensor dimensions and weight: 24 x 34 x 24 mm, 20 g
Adapter dimensions and weight: 53 x 25 x 18 mm, 27 g

BE9251 model

The BE9251 model connects to all Bellman & Symfon products that features a 2.5 mm ext. trig. input.

Compatibility

- BE1431 Telephone transmitter
- BE1441 Visit flash receiver
- BE1442 Visit flash receiver with battery backup
- BE1444 Visit flash receiver with battery backup and advanced smoke detector supervision

Technical specifications

- Placement: Horizontally on the display
- Optical detection: Activated when the display lights up
- Light sensitivity: Visible light >3 lux for longer than 2 s
- Connector: 2.5 mm mono jack plug
- Cable length: 120 cm, 4'
- Sensor dimensions and weight: 24 x 34 x 24 mm, 20 g