

Wakes you with vibrations under the pillow or mattress.

The Bed Shaker from Bellman & Symfon is powerful enough to wake even the heaviest sleeper. Just place it under your mattress or pillow and plug it into your Bellman & Symfon receiver or desktop charger.

The Bed Shaker produces strong vibrations and requires no internal batteries. It features an anti-slip surface that holds it in place when it vibrates and is equipped with a long cable so you can place it anywhere you want.






Dimensions and weight

 Height:
 88 mm, 3.5"

 Width:
 88 mm, 3.5"


 Depth:
 27 mm, 1.1"

 Weight:
 120 g, 4.2 oz.

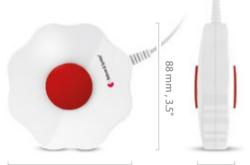

88 mm, 3.5" 27 mm , 1.1"

Connections

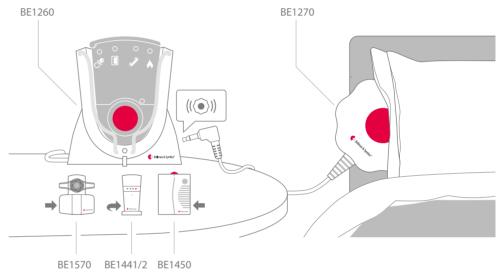

Compability

The bed shaker can be connected to the following products:

Visit receivers

- BE1441 Visit Flash Receiver
- BE1033 Visit Portable Receiver
- BE1380/BE1580 Visit Alarm Clock

Visit accessories

- BE1260 Pager Charger Accessory for the BE1470 Visit Pager Receiver
- BE1570 Visit Wrist Receiver Charger for the BE1560 Wrist Receiver

Alarm Clocks

- BE1350 Alarm Clock Classic (no longer available)
- BE1370 Alarm Clock Pro

Compliance

This product complies with applicable FCC and ISED Canada regulations.

本機器は日本の電波法に適合しています.

Power consumption

- Operating voltage
 2.0 4.0 V DC from a Visit receiver
- Power consumption 250 – 750 mA

Cables and connectors

- Cable length: 2 m, 6.5
- Connector: 3.5 mm mono

Maintenance and cleaning

- Maintenance free. Clean with a dry cloth.
- Do not use household cleaners, aerosol sprays, solvents, alcohol, ammonia, or abrasives.
- Not reusable.

Environmental requirements

- For indoor use only
- Temperature: 0° to 35° C, 32° to 95° F
- Relative humidity: 15% to 90% (non condensing)

In the box

■ BE1270 Bed Shaker



© 2025 Bellman & Symfon AB. All rights reserved.

Bellman, Bellman & Symfon and the Bellman & Symfon logo are registered trademarks of Bellman & Symfon AB. This leaflet is subject to change without prior notice.

BE1270_001DAS1.0-EN

bellman.com